

APPLICATION




A spark arresting silencer for use on exhaust of internal combustion engines where fire hazards exist, and minimal silencing is required. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in easily accessible cleanouts.

CONSTRUCTION

Heavy duty steel construction. Sizes 3.5" and below come standard with Male NPT connections. Sizes 4" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 14" and smaller, and high heat black paint on sizes 16" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

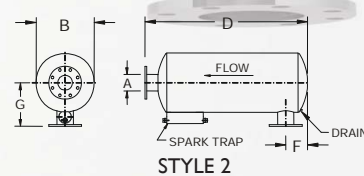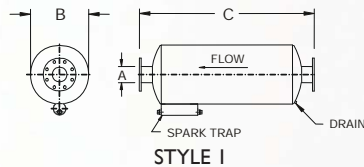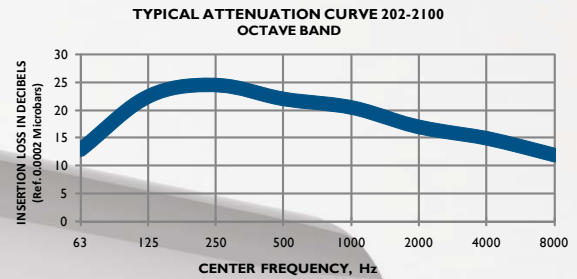

Part Number	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F	G Flange-Center	WT
202-2104	4	14	32	29	6	11	70
202-2105	5	14	42	39	6	11	85
202-2106	6	18	49	45	9	13	125
202-2108	8	22	50	46	10	15	215
202-2110	10	26	63	59	12	17	285
202-2112	12	30	76	72	13	19	495
202-2114	14	36	78	74	15	22	755
202-2116	16	42	81	77	17	25	805
202-2118	18	48	100	96	18	28	1105
202-2120	20	48	118	114	22	28	1325
202-2122	22	54	120	116	22	31	1905
202-2124	24	60	132	128	24	34	2235

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.
Additional connections available.

All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: 202-2108 (22" dia) would require 28-2200 brackets (or similar 29 brackets).

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01