

APPLICATION




A spark arresting silencer for use on exhaust of internal combustion engines where fire hazards exist. Well suited for applications where surrounding environment requires a moderate level of silencing. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in easily accessible cleanouts.

CONSTRUCTION

Heavy duty steel construction. Sizes 3.5" and below come standard with Male NPT connections. Sizes 4" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 10" and smaller, and high heat black paint on sizes 12" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

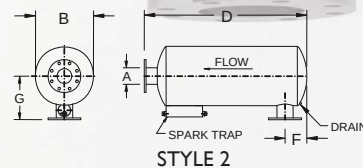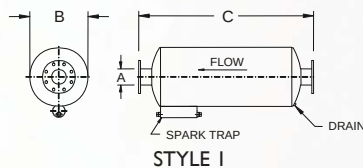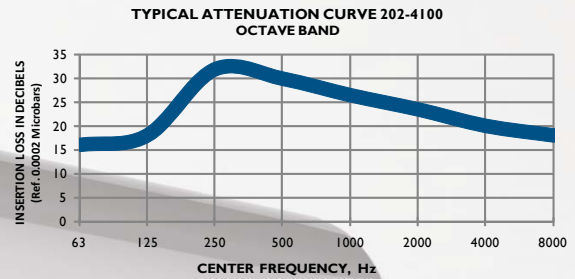

Part Number	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F	G Flange-Center	WT
202-41015	1.5	8	30	27	4	8	36
202-4102	2	8	30	27	5	8	45
202-41025	2.5	10	36	33	6	8	50
202-4103	3	10	36	33	6	8	55
202-41035	3.5	14	42	39	6	10	72
202-4104	4	14	42	39	6	11	76
202-4105	5	14	54	51	6	11	125
202-4106	6	18	61	57	9	13	180
202-4108	8	22	71	69	10	15	285
202-4110	10	26	93	90	12	17	440
202-4112	12	30	112	108	13	19	670
202-4114	14	36	108	104	15	22	910
202-4116	16	42	111	107	17	25	995
202-4118	18	48	118	114	18	28	1310
202-4120	20	48	142	138	20	28	1515
202-4122	22	54	144	140	22	31	1745
202-4124	24	60	144	140	24	34	2035

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.
Additional connections available.

All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: 202-4108 (22" dia) would require 28-2200 brackets (or similar 29 brackets).

PRICES