

### APPLICATION




A spark arresting silencer for use on exhaust of internal combustion engines where fire hazards exist. Well suited for applications where surrounding environment requires a high level of silencing. Centrifugal force separates solids from the exhaust gas stream. Solids are then deposited in easily accessible cleanouts.

### CONSTRUCTION

Heavy duty steel construction. Sizes 3.5" and below come standard with Male NPT connections. Sizes 4" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

### FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 10" and smaller, and high heat black paint on sizes 12" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

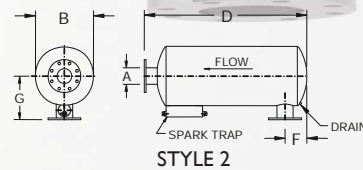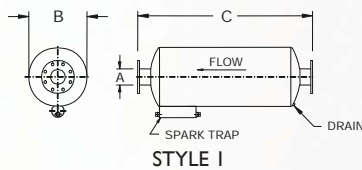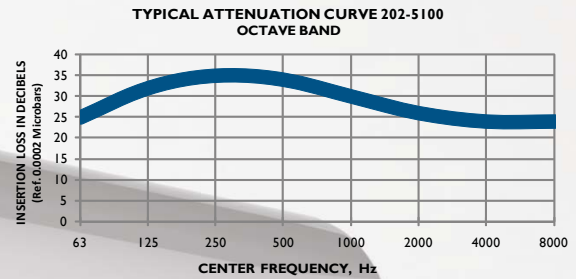

Part Number	A Inlet Size	B Diameter	C OAL - Style 1	D OAL - Style 2	F Min	F Max	G Flange-Center	WT
202-5104	4	16	48	44	6	15	12	130
202-5105	5	16	48	44	6	15	12	145
202-5106	6	20	61	57	8	19	14	185
202-5108	8	24	73	69	10	27	16	295
202-5110	10	30	94	90	12	39	19	580
202-5112	12	36	112	109	13	49	22	860
202-5114	14	42	116	112	15	47	25	990
202-5116	16	45	130	127	17	46	26.5	1190
202-5118	18	48	142	139	19	47	28	1490
202-5120	20	48	165	162	20	47	28	1810
202-5122	22	54	168	164	21	45	32	2110
202-5124	24	60	168	165	25	68	34	2790

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.

Additional connections available. F MAX is for inlet only.

All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: 202-5108 (24" dia) would require 28-2400 brackets (or similar 29 brackets).

**PRICES**

**FREIGHT:** Prepaid unless preapproved by GT Exhaust.

**TERMS:** Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01