



H3-5 (H4-5) HARMONY™ DISK

Critical Grade - 25 to 31 dB(A)

1" Thermal Packing



APPLICATION




Harmony™ disk silencers feature improved insulation capabilities and advanced heat retention in a space-saving design. This low profile silencer provides extraordinary performance in a compact size, and is excellent in applications where size restriction is a critical factor.

CONSTRUCTION

Includes a compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the one inch thick packed shell provides a reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-H brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat powder coat finish. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

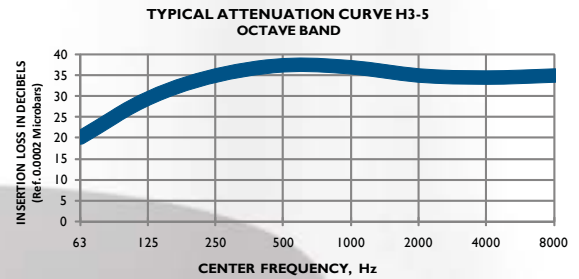

Part Number	A Inlet Size	B Diameter	C OAL	E	G	H	WT
3-5-4	4	28	32	22.07	7.5	7	134
3-5-5	5	28	32	22.07	9	10	156
3-5-6	6	33	37	25.6	9	10	201
3-5-8	8	45	49	35.15	10	12	371
3-5-10	10	52	56	40.1	11	14	491
3-5-12	12	59	63	45.05	12.5	17	631
3-5-14	14	65	69	49.29	14	20	779
3-5-16	16	74	78	55.66	15.5	23	1033
3-5-18	18	84	88	62.73	16.5	25	1283

All spatial dimensions are in inches.
Additional connections available.
All weights are in pounds. All weights are approximate.

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01