



501-C2-5100 SLIM LINE SILENCER

Critical Grade - 35 to 42 dB(A)

2" Thermal Packing



APPLICATION



Space saving design specifically engineered to provide extraordinary attenuation in a space saving design. For applications where ambient noise levels are relatively low. Excellent for use in enclosures, trailers, marine, or any application where space is extremely restricted.

CONSTRUCTION

Features compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the two inch thick packed shell provides a significant reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-I brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat black paint. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

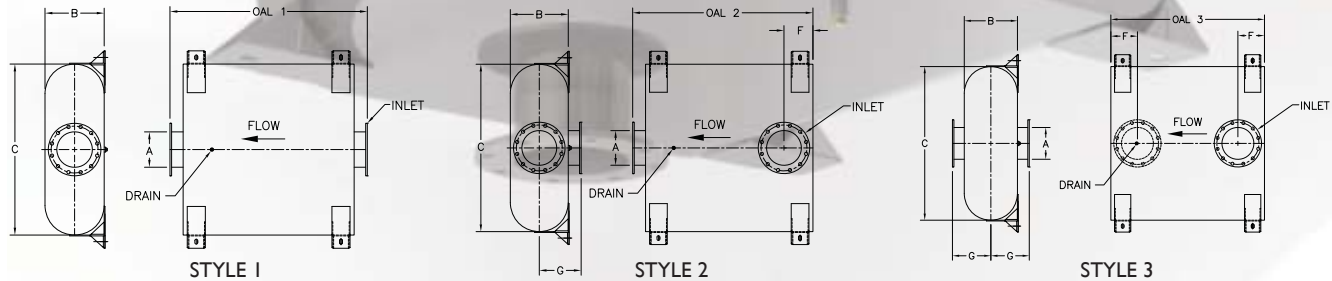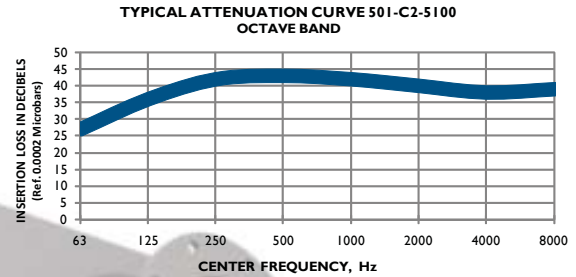

Part Number	A Size	B Dia	C	OAL 1	OAL 2	OAL 3	F Min	F Max	G	WT
501-C2-5104	4	11	28	36	32	28	6	8	9.5	130
501-C2-5105	5	12	29	37	33	29	6.5	15	10	165
501-C2-5106	6	13	33	41	37	33	7	17	10.5	220
501-C2-5108	8	15	45	54	50	46	8	24	11.5	415
501-C2-5110	10	18	52	60	56	52	9	27	13	605
501-C2-5112	12	21	62	70	66	62	10	33	14.5	830
501-C2-5114	14	23	65	74	70	66	11	34	15.5	1005
501-C2-5116	16	25	74	83	79	75	12	39	16.5	1345
501-C2-5118	18	27	84	94	90	85	14	46	17.5	1700
501-C2-5120	20	30	88	98	94	90	15	47	19	2055

All spatial dimensions are in inches.

Additional options available.

F Max is for inlet only.

All weights are in pounds. All weights are approximate.

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01