

APPLICATION



Space saving design specifically engineered to provide extraordinary attenuation in a space saving design. For applications where ambient noise levels are relatively low. Excellent for use in enclosures, trailers, marine, or any application where space is extremely restricted.

CONSTRUCTION

Features compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the one inch thick packed shell provides a reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-l brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat black paint. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

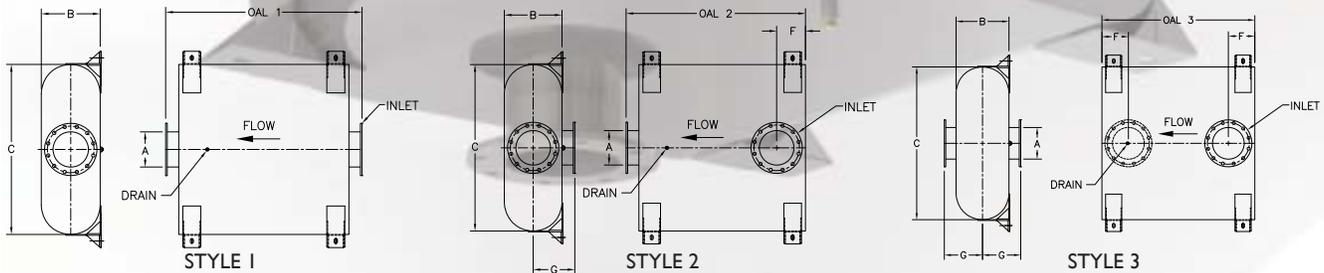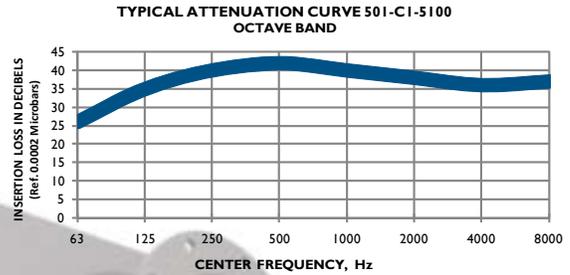

Part Number	A Size	B Dia	C	OAL 1	OAL 2	OAL 3	F Min	F Max	G	WT
501-C1-5104	4	9	26	34	30	26	5	8	8.5	119
501-C1-5105	5	10	27	35	31	27	5.5	17	9	152
501-C1-5106	6	11	31	39	35	31	6	16	9.5	206
501-C1-5108	8	13	43	52	48	44	7	23	10.5	385
501-C1-5110	10	16	50	58	54	50	8	26	12	559
501-C1-5112	12	19	60	68	64	60	9	32	13.5	771
501-C1-5114	14	21	63	72	68	64	10	34	14.5	929
501-C1-5116	16	23	72	81	77	73	11	38	15.5	1282
501-C1-5118	18	25	82	92	88	84	12	45	16.5	1576
501-C1-5120	20	28	86	96	92	88	14	46	18	1902

All spatial dimensions are in inches.

Additional options available.

F Max is for inlet only.

All weights are in pounds. All weights are approximate.

PRICES