



501-5200 SLIM LINE SILENCER

Critical Grade - 31 to 38 dB(A)

No Thermal Packing



APPLICATION



Space saving design specifically engineered to provide a high degree of attenuation in a space saving design. For applications where ambient noise levels are relatively low. Excellent for use in enclosures, trailers, marine, or any application where space is extremely restricted.

CONSTRUCTION

A critical grade Slim Line silencer without compressed internal packing. Comes standard with bottom mounted 29-l brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat black paint. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

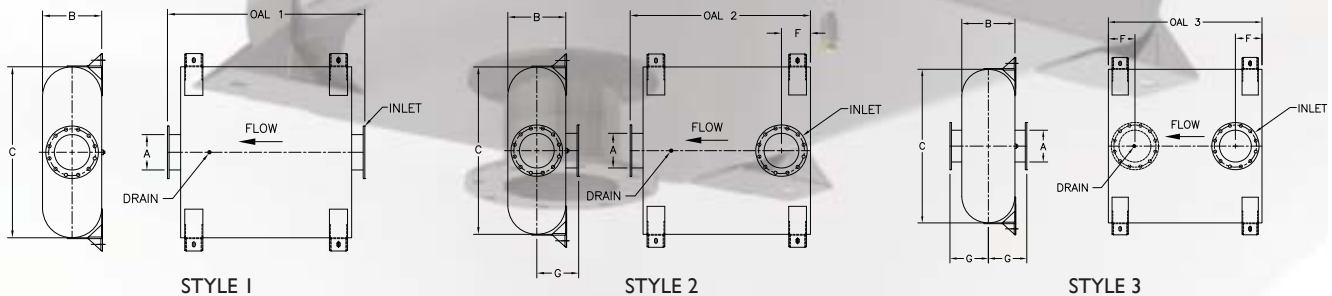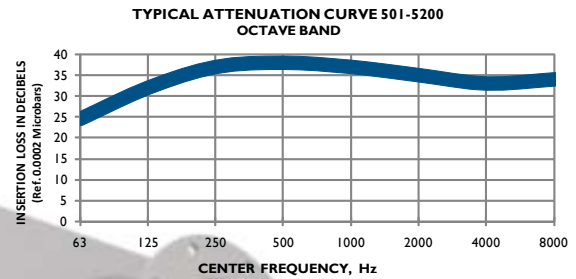

Part Number	A Size	B Dia	C	OAL 1	OAL 2	OAL 3	F Min	F Max	G	WT
501-5204	4	9	26	34	30	26	5	8	8.5	108
501-5205	5	10	27	35	31	27	5.5	17	9	140
501-5206	6	11	31	39	35	31	6	16	9.5	190
501-5208	8	13	43	52	48	44	7	23	105	355
501-5210	10	16	50	58	54	50	8	26	12	518
501-5212	12	19	60	68	64	60	9	32	13.5	713
501-5214	14	21	63	72	68	64	10	34	14.5	862
501-5216	16	23	72	81	77	73	11	38	15.5	1196
501-5218	18	25	82	92	88	84	12	45	16.5	1464
501-5220	20	28	86	96	92	88	14	46	18	1776

All spatial dimensions are in inches.
Additional options available, including leak testing and lifting lugs.

F Max is for inlet only.

All weights are in pounds. All weights are approximate.

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01