



501-C2-6100 SLIM LINE SILENCER

Super Critical Grade - 39 to 46 dB(A)

2" Thermal Packing



APPLICATION



Space saving design specifically engineered to provide extraordinary attenuation in a space saving design. For applications where ambient noise levels are relatively low. Excellent for use in enclosures, trailers, marine, or any application where space is extremely restricted.

CONSTRUCTION

Features compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the two inch thick packed shell provides a significant reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-I brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat black paint. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

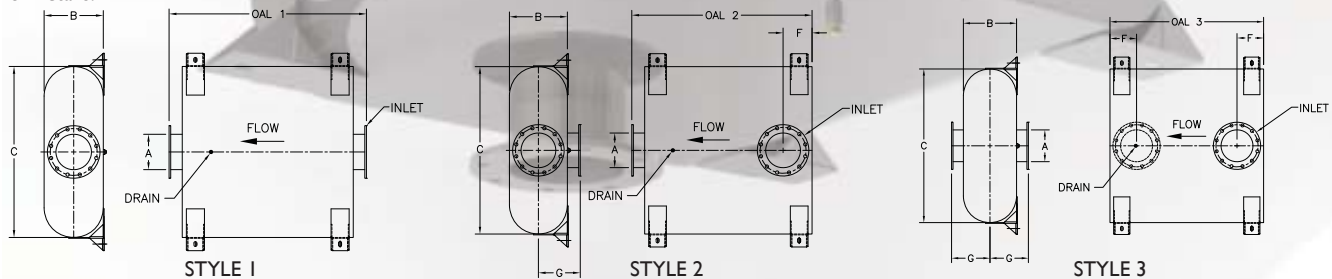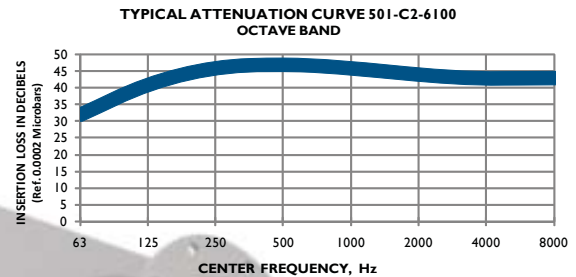

Part Number	A Size	B Dia	C	OAL 1	OAL 2	OAL 3	F Min	F Max	G	WT
501-C2-6104	4	11	34	42	38	34	6	11	9.5	175
501-C2-6105	5	12	34	42	38	34	6.5	18	10	205
501-C2-6106	6	13	38	46	42	38	7	20	10.5	275
501-C2-6108	8	15	52	60	56	52	8	28	11.5	575
501-C2-6110	10	18	59	67	63	59	9	31	13	790
501-C2-6112	12	21	70	78	74	70	10	38	14.5	1065
501-C2-6114	14	24	70	78	74	70	11	37	16	1220
501-C2-6116	16	28	75	84	80	76	12	40	18	1450
501-C2-6118	18	30	86	96	92	88	14	47	19	1875
501-C2-6120	20	34	92	102	98	94	15	50	21	2220

All spatial dimensions are in inches.

Additional options available.

F Max is for inlet only.

All weights are in pounds. All weights are approximate.

PRICES