



# 501-C1-6100 SLIM LINE SILENCER

Super Critical Grade - 37 to 44 dB(A)

1" Thermal Packing



## APPLICATION



Space saving design specifically engineered to provide extraordinary attenuation in a space saving design. For applications where ambient noise levels are relatively low. Excellent for use in enclosures, trailers, marine, or any application where space is extremely restricted.

## CONSTRUCTION

Features compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the one inch thick packed shell provides a reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-l brackets, with the option of top mounted brackets.

## FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat black paint. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

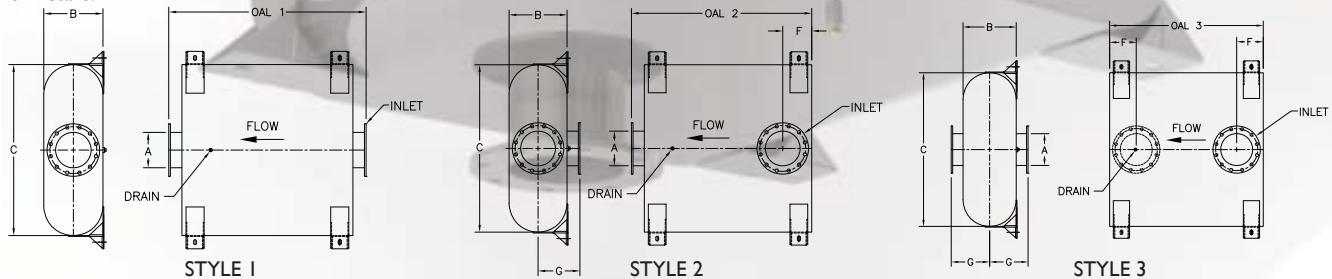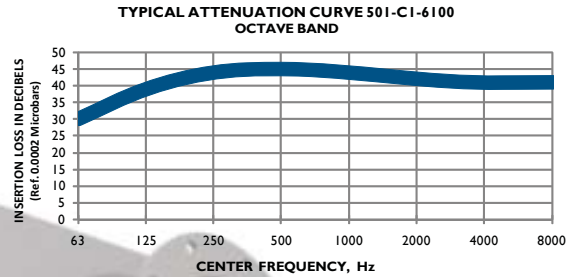

Part Number	A Size	B Dia	C	OAL 1	OAL 2	OAL 3	F Min	F Max	G	WT
501-C1-6104	4	9	32	40	36	32	5	11	8.5	158
501-C1-6105	5	10	32	40	36	32	5.5	10.5	9	190
501-C1-6106	6	11	36	44	40	36	6	12	9.5	255
501-C1-6108	8	13	50	58	54	50	7	18	10.5	534
501-C1-6110	10	16	57	65	61	57	8	20.5	12	730
501-C1-6112	12	19	68	76	72	68	9	37	13.5	986
501-C1-6114	14	22	68	76	72	68	10	24	15	1129
501-C1-6116	16	26	73	82	78	74	11	26	17	1345
501-C1-6118	18	28	84	94	90	86	13	31	18	1735
501-C1-6120	20	32	90	100	96	92	14	33	20	2054

All spatial dimensions are in inches.

Additional options available.

F Max is for inlet only.

All weights are in pounds. All weights are approximate.

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01