



HI-6 (H2-6) HARMONY™ DISK

Super Critical Grade - 34 to 40 dB(A)

2" Thermal Packing



APPLICATION




Harmony™ disk silencers feature improved insulation capabilities and advanced heat retention in a space-saving design. This low profile silencer provides extraordinary performance in a compact size, and is excellent in applications where size restriction is a critical factor.

CONSTRUCTION

Includes a compressed thermal/acoustical fiberglass packed shell. In addition to its acoustical value, the two inch thick packed shell provides a significant reduction in the outer surface temperature. Actual values depend on the exhaust temperature and ambient conditions. Comes standard with bottom mounted 29-H brackets, with the option of top mounted brackets.

FINISH AND OPTIONAL MATERIALS

Heavy duty steel construction with a high heat powder coat finish. Flanged inlet and outlet standard. Additional connections, as well as flush mounted inlets, are available. Stainless steel available. Call factory for details.

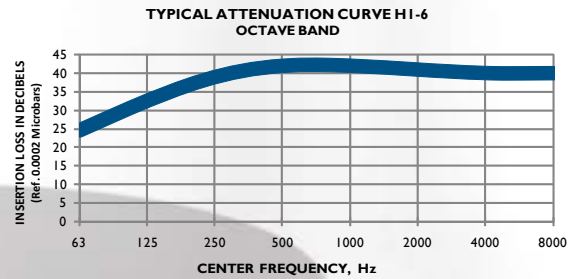

Part Number	A Inlet Size	B Diameter	C OAL	E	G	H	WT
1-6-4	4	32	36	24.9	9	10	175
1-6-5	5	33	37	25.6	10	12	201
1-6-6	6	45	49	35.15	11	14	342
1-6-8	8	52	56	40.1	12	16	528
1-6-10	10	59	63	45.05	13	18	680
1-6-12	12	70	74	52.83	13	18	907
1-6-14	14	74	78	55.66	16.5	25	997
1-6-16	16	74	78	55.66	18	28	1083
1-6-18	18	84	88	62.73	19	30	1623

All spatial dimensions are in inches.
Additional connections available.
All weights are in pounds. All weights are approximate.

PRICES

FREIGHT: Prepaid unless preapproved by GT Exhaust.

TERMS: Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01