

APPLICATION

This silencer builds on the performance levels of the Critical Grade silencer, providing further attenuation on high end frequencies while maintaining the size of an A201-5100 unit. Users will gain optimal sound reduction on an application without having to upgrade to the performance-based Super-Critical grade of silencers.




CONSTRUCTION

Heavy duty steel construction. Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 12" and smaller, and high heat black paint on sizes 14" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details. Call factory for optional coatings.

TYPICAL ATTENUATION CURVE A201-5600
OCTAVE BAND

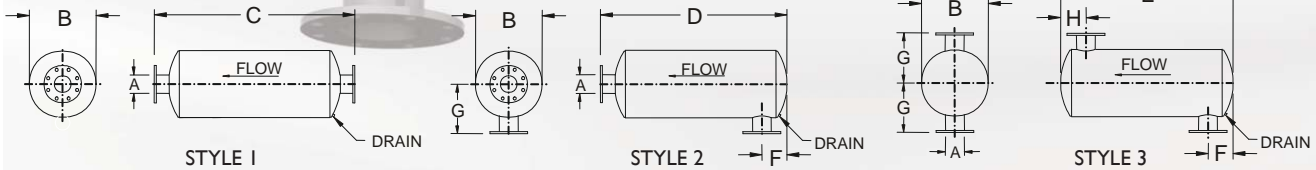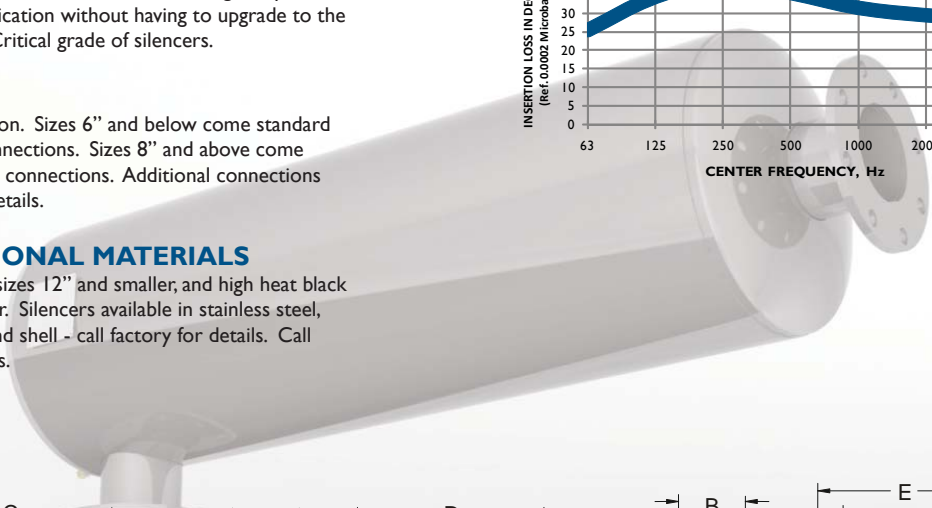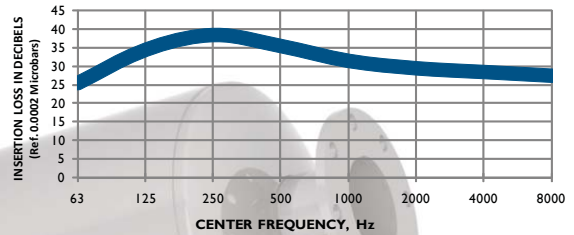

Part Number	A Inlet Size	B Diameter	C OAL - 1	D OAL - 2	E OAL - 3	F Min	F Max	G Flange-Center	H Min	H Max
A201-56015	1.5	6	30	27	24	3	10	6	3	8
A201-5602	2	8	31	28	25	4	9	7	4	8
A201-56025	2.5	8	41	38	35	4	14	7	4	12
A201-5603	3	10	42	39	36	5	14	8	5	12
A201-56035	3.5	10	54	51	48	5	21	8	5	17
A201-5604	4	12	55	52	49	6	21	10	6	16
A201-5605	5	14	61	57	53	7	23	11	7	18
A201-5606	6	16	73	70	66	8	29	12	8	22
A201-5608	8	20	75	71	67	9	29	14	9	22
A201-5610	10	24	99	95	92	11	42	16	11	32
A201-5612	12	28	100	97	93	12	41	18	12	31
A201-5614	14	30	136	133	130	14	61	19	14	46
A201-5616	16	36	139	136	132	16	60	22	16	45
A201-5618	18	42	141	138	134	18	59	26	18	45
A201-5620	20	42	164	161	158	19	34	26	19	21
A201-5622	22	48	164	161	159	20	33	29	20	21
A201-5624	24	54	166	163	161	23	71	32	23	54

Sizes 6" and below come standard with ID Cuff / OD Tube connections. Sizes 8" and above come standard with ANSI Flanged connections.

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.

Additional connections available. [See Silencer Price Book pg. 48 for breakdown of A200 part number.](#)

F MAX is for inlet only. H MAX is for outlet only. All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: A201-5608 (20" dia) would require 28-2000 brackets (or similar 29 brackets).

PRICES