

## APPLICATION



A rugged heavy duty silencer for commercial or industrial areas where ambient noise levels are high.

## CONSTRUCTION

Heavy duty steel construction. Comes standard with ANSI Flanged connections. Additional connections available. Call factory for details.

## FINISH AND OPTIONAL MATERIALS

High heat powder coat on standard units. High heat black paint available upon request. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

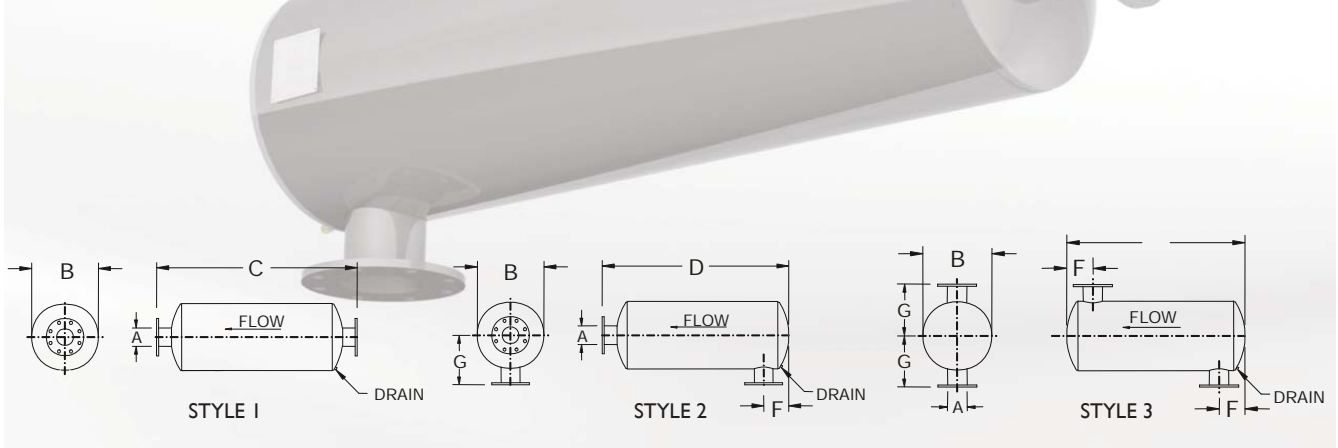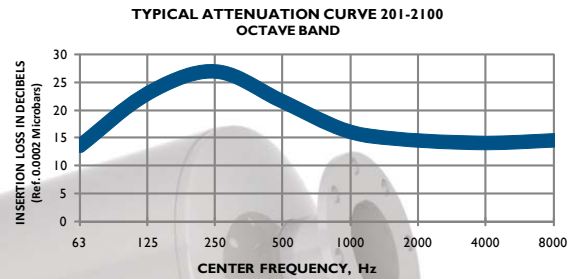

Part Number	A Inlet Size	B Diameter	C OAL - 1	D OAL - 2	E OAL - 3	F Min	G Flange-Center	WT
201-2104	4	10	36	33	30	5	8	48
201-2105	5	10	42	39	36	5	9	55
201-2106	6	12	42	39	36	6	9	65
201-2108	8	18	49	45	42	8	13	150
201-2110	10	22	62	59	56	12	15	205
201-2112	12	26	63	59	56	13	17	260
201-2114	14	30	76	73	70	15	19	475

All spatial dimensions are in inches.

Additional connections available.

All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: 201-2108 (18" dia) would require 28-1800 brackets (or similar 29 brackets).

**PRICES**

**FREIGHT:** Prepaid unless preapproved by GT Exhaust.

**TERMS:** Net 30 days.

Prices subject to change without notice. Restocking charge 25% / \$50 minimum.

Specialty items are non-returnable and non-refundable.

Minimum order size \$50. All prices are in US Dollars.

Ref. # SSB 06-01-2011-01