

APPLICATION



For areas where ambient noise levels are moderate. Excellent for use on stationary, marine, and mobile power units. Well suited for applications requiring moderate silencing.

CONSTRUCTION

Heavy duty steel construction. Sizes 3.5" and below come standard with Male NPT connections. Sizes 4" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 12" and smaller; and high heat black paint on sizes 14" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

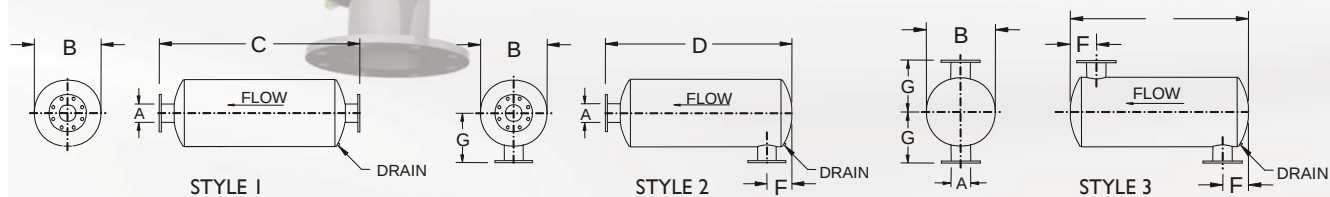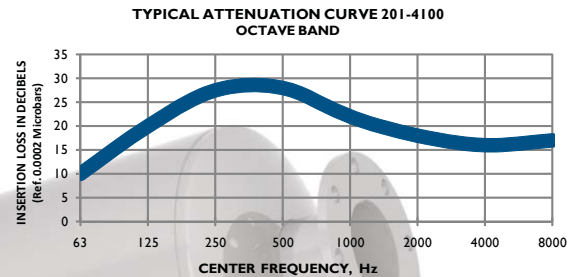

Part Number	A Inlet Size	B Diameter	C OAL - 1	D OAL - 2	E OAL - 3	F Min	F Max	G Flange-Center	WT
201-41015	1.5	6	30	27	24	2	12	5	25
201-4102	2	6.5	36	33	30	3	16	6	35
201-41025	2.5	8	42	39	36	3	21	7	39
201-4103	3	8	42	39	36	3	20	7	42
201-41035	3.5	10	46	43	40	4	21	8	48
201-4104	4	10	46	43	40	5	20	8	50
201-4105	5	10	54	51	48	6	26	9	60
201-4106	6	12	54	51	48	6	24	9	69
201-4108	8	18	61	57	54	8	23	13	145
201-4110	10	22	74	71	67	12	31	15	220
201-4112	12	26	75	72	69	13	30	17	30
201-4114	14	30	100	97	94	15	44	19	615
201-4116	16	36	114	111	109	17	56	22	980
201-4118	18	36	126	123	119	18	55	22	1175
201-4120	20	42	139	136	133	20	72	25	1300
201-4122	22	48	141	138	136	22	65	29	1575
201-4124	24	54	142	139	137	24	64	31	2000

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.

Additional connections available. F MAX is for inlet only.

All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: 201-4108 (18" dia) would require 28-1800 brackets (or similar 29 brackets).

PRICES