

APPLICATION



Excellent superior critical grade silencer providing a premium level of performance where ambient noise levels are very low and optimal attenuation is mandatory. Recommended for all marine, stationary, and mobile, power applications where noise attenuation is critical.

CONSTRUCTION

Heavy duty steel construction. Sizes 3.5" and below come standard with Male NPT connections. Sizes 4" and above come standard with ANSI Flanged connections. Additional connections available. Call factory for details.

FINISH AND OPTIONAL MATERIALS

High heat powder coat on sizes 12" and smaller, and high heat black paint on sizes 14" and larger. Silencers available in stainless steel, or with aluminized heads and shell - call factory for details.

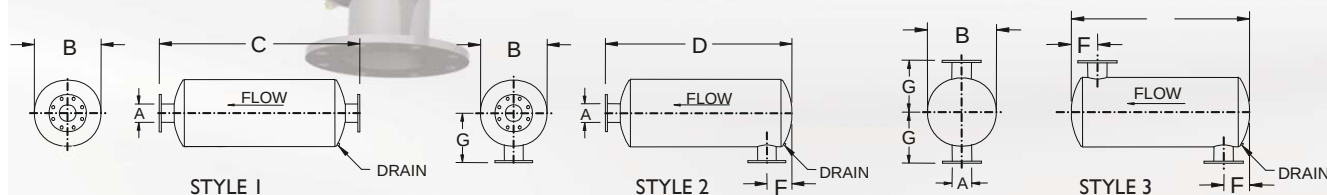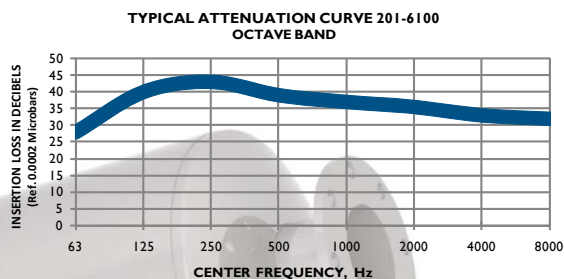

Part Number	A Inlet Size	B Diameter	C OAL - 1	D OAL - 2	E OAL - 3	F Min	F Max	G Flange-Center	WT
201-6102	2	12	42	39	36	6	17	9	94
201-61025	2.5	12	42	39	36	6	17	9	96
201-6103	3	14	52	49	46	8	20	10	130
201-61035	3.5	16	60	58	53	8	28	12	152
201-6104	4	16	61	57	53	8	25	12	170
201-6105	5	20	74	71	68	10	30	14	240
201-6106	6	24	75	71	67	10	30	16	305
201-6108	8	26	100	96	92	10	40	17	455
201-6110	10	30	112	109	106	12	46	19	805
201-6112	12	36	138	134	130	14	45	22	1375
201-6114	14	42	164	162	158	16	58	25	2010
201-6116	16	45	165	162	158	18	57	27	2136
201-6118	18	48	177	174	171	20	56	29	2535
201-6120	20	54	179	176	173	22	56	32	3340
201-6122	22	60	205	202	199	24	68	35	3785
201-6124	24	62	205	202	199	26	67	36	3985

All spatial dimensions are in inches. Inlet sizes available up to 30.0 inches.

Additional connections available. F MAX is for inlet only.

All weights are in pounds. All weights are approximate.

Use diameter to find bracket sizes. Example: 201-6108 (26" dia) would require 28-2600 brackets (or similar 29 brackets).

PRICES